
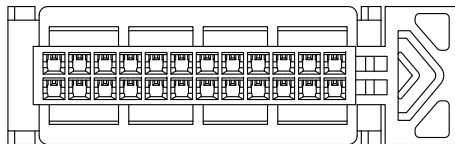
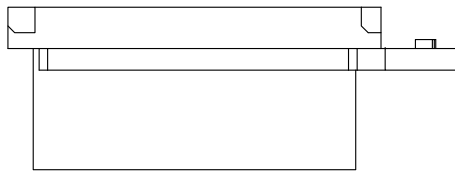

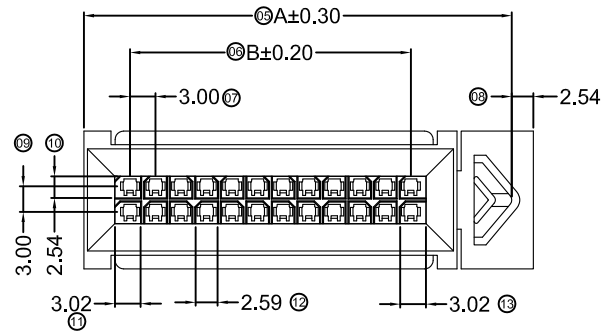
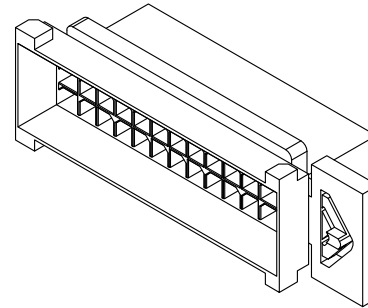


RoHS

TEL:0769-82285488

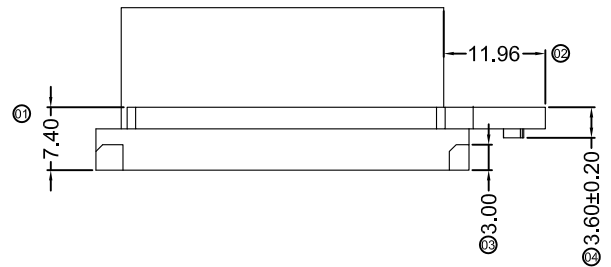

Specifications :

- Voltage rating: 250V AC / DC
- Current rating: 5A AC / DC
- Withstanding voltage: 1000V AC/minute
- Temperature range: -40°C~+105°C
- Insulation resistance: $\geq 1000\text{M}\Omega$
- Contact resistance: $\leq 10\text{m}\Omega$
- After environmental testing: $\leq 20\text{m}\Omega$

3025 H F - 2xXX - N0 B B R 01 F
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩

- ① Series No.
② Category: H-HSG
③ Product form: F-Female HSG
④ Row No.-Pin No.: 2xXX-Double Row
⑤ Material: N0-PA66 94V-0
⑥ Colour: B- Black
⑦ Packing: B-Bag
⑧ Green code: R-Rohs
⑨ Water code: 01
⑩ Special code :F-Other Connectors

Poles	Dimensions(mm)		Poles	Dimensions(mm)	
	A	B		A	B
2x01	20.3	3.00	2x07	35.3	18.00
2x02			2x08	38.3	21.00
2x03	23.3	6.00	2x09	41.3	24.00
2x04	26.3	9.00	2x10	44.3	27.00
2x05	29.3	12.00	2x11	47.3	30.00
2x06	32.3	15.00	2x12	50.3	33.00

GENERAL
TOLERANCE

.X ± 0.30
.XX ± 0.20
.XXX ± 0.10



思量连接器有限公司
ADZL CONNECTORS CO.,LTD

PART NO.

3025HF-2xXX-N0BBR01F

TITLE

3.00 mm Crimp Style Connectors

PROJECT



APPROVAL

Ken

CHECK

Wisely He

DRAWN

Allen

DATA

2018/9/6

UNIT

MM

SCALE

1:1

NUMBER

A-000

REV

A

DATE

OLD
REV

NEW
REV

ECN

DESCRIPTION

CHECK

APPROVAL

1

2

3

4

5







6

7

8

RoHS

TEL:0769-82285488

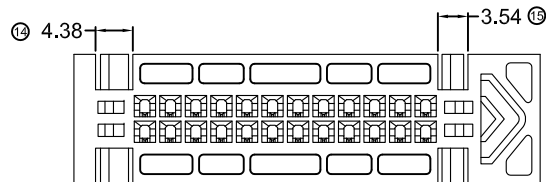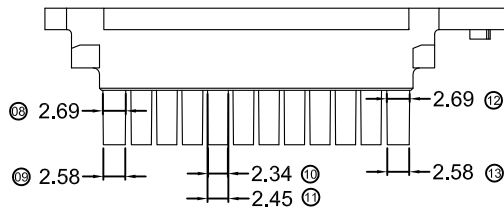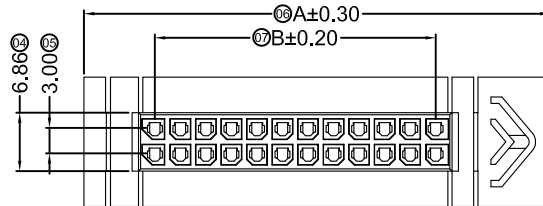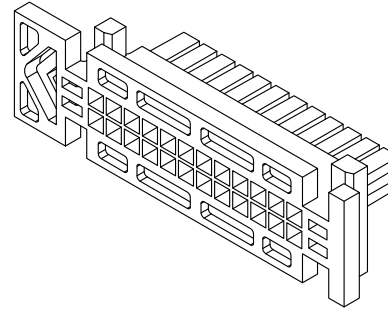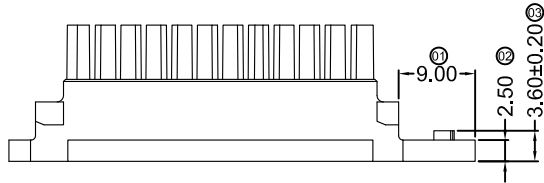

Specifications :

- Voltage rating: 250V AC / DC
- Current rating: 5A AC / DC
- Withstanding voltage: 1000V AC/minute
- Temperature range: -40°C~+105°C
- Insulation resistance: ≥1000MΩ
- Contact resistance: ≤10mΩ
- After environmental testing: ≤20mΩ

3025 H M - 2xXX - N0 B B R 01 F
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩

- ① Series No.
② Category: H-HSG
③ Product form: M-Male HSG
④ Row No.-Pin No.: 2xXX-Double Row
⑤ Material: N0-PA66 94V-0
⑥ Colour: B- Black
⑦ Packing: B-Bag
⑧ Green code: R-Rohs
⑨ Water code: 01
⑩ Special code :F-Other Connectors

Poles	Dimensions(mm)		Poles	Dimensions(mm)	
	A	B		A	B
2*01			2*07	39.8	18.00
2*02	24.6	3.00	2*08	42.8	21.00
2*03	27.7	6.00	2*09	45.8	24.00
2*04	30.7	9.00	2*10	48.8	27.00
2*05	33.8	12.00	2*11	51.8	30.00
2*06	36.8	15.00	2*12	54.8	33.00

GENERAL
TOLERANCE

.X ±0.30

.XX ±0.20

.XXX ±0.10

PROJECT

思量连接器有限公司
ADZL CONNECTORS CO.,LTD

APPROVAL

Ken

CHECK

Wisely He

DRAWN

Allen

DATA

2018/9/6

PART NO.

3025HM-2xXX-N0BBR01F

TITLE

3.00 mm Crimp Style Connectors

UNIT

MM

SCALE

1:1

NUMBER

A-000

REV

A

DATE

OLD
REVNEW
REV

ECN

DESCRIPTION

CHECK

APPROVAL

1

2

3

4

5



6

7

8

RoHS

TEL:0769-82285488




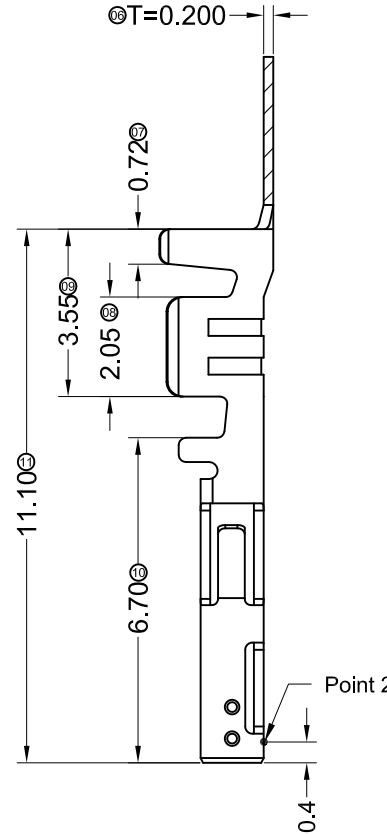
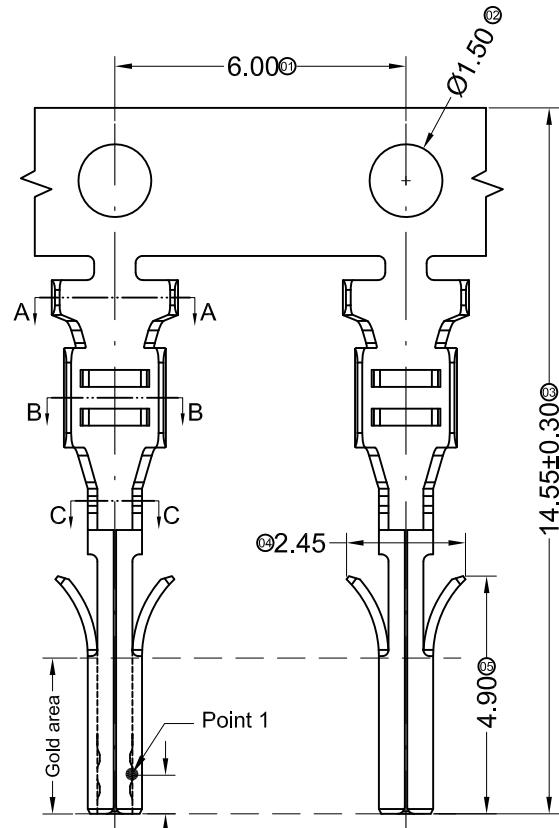
**Specifications :**

- Voltage rating: 250V AC / DC
- Current rating: 5A AC / DC
- Withstanding voltage: 1000V AC/minute
- Temperature range: -40°C~+105°C
- Insulation resistance: ≥1000MΩ
- Contact resistance: ≤10mΩ
- After environmental testing: ≤20mΩ

3025 T F-P XX X-X

① ② ③ ④ ⑤ ⑥ ⑦

- ① Series Number
② Category: T-terminal
③ Shape: F-Female Terminal
④ Material: P-Phosphor bronze
⑤ Plating style:
G30- Contact point gold 30u "(inside) Gold area1u"(outside)
Other area Ni 20u" Min
G15- Contact point gold 15u "(inside) Gold area1u"(outside)
Other area Ni 20u" Min
G01-Contact Area Gold Flash
SN-Bright tin plating
⑥ Plating method:
Blank-Stamping before plating
⑦ Mold No./Mark/Special No.

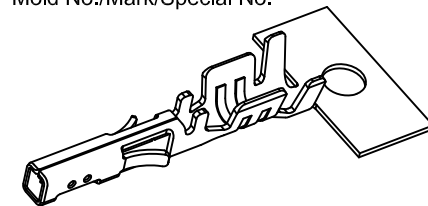SECTION: A-A
SCALE: 1:1SECTION: B-B
SCALE: 1:1SECTION: C-C
SCALE: 1:1

3025TF-PG30	Phosphor Bronze	AWG#20-24	1.85mm(Max)	Stamping Before Pating:20u" Min, Ni; Contact Area Gold:30u" Min.	Point 1	3025HM
3025TF-PG15				Stamping Before Pating:20u" Min, Ni; Contact Area Gold:15u" Min.		
3025TF-PG01				Stamping Before Pating:50u" Min, Ni; Contact Area Gold Flash	Point 2	
3025TF-PSN				Stamping Before Pating:50u" MIN. Ni; 100u" MIN. Sn		
PART NO	Material	Wire Range	Insulation O.D.	Finish	Plating measuring point	Used In ADZL Housing

DATE	OLD REV	NEW REV	ECN	DESCRIPTION	CHECK	APPROVAL
1						
2						
3						
4						


GENERAL
TOLERANCE
.X ±0.30
.XX ±0.20
.XXX ±0.10PROJECT
ADZL思量连接器有限公司
ADZL CONNECTORS CO.,LTD

APPROVAL	CHECK	DRAWN	DATA
Ken	Wisely He	Allen	2015/03/31

PART NO. 3025TF-PXXX			
TITLE 3.00mm Crimp Style Connectors			
UNIT MM	SCALE 1:1	NUMBER A-014	REV C

RoHS

TEL:0769-82285488

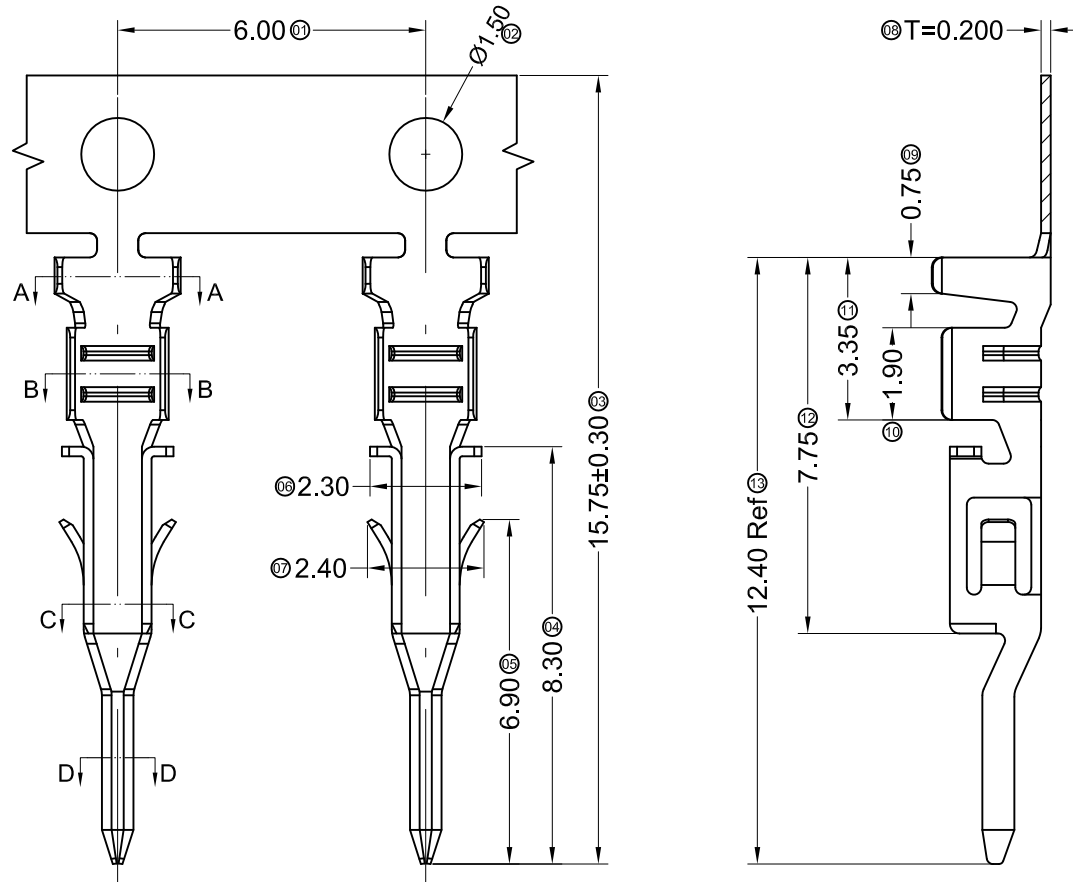
**Specifications :**

- Voltage rating: 250V AC / DC
- Current rating: 5A AC / DC
- Withstanding voltage: 1000V AC/minute
- Temperature range: -40°C~+105°C
- Insulation resistance: $\geq 1000M\Omega$
- Contact resistance: $\leq 10m\Omega$
- After environmental testing: $\leq 20m\Omega$

3025 T M-P XX X-X

(1) (2) (3) (4) (5) (6) (7)

- (1) Series Number
- (2) Category: T-terminal
- (3) Shape: M-male
- (4) Material: P-Phosphor bronze
- (5) Plating style: SN-Bright tin plating
- (6) Plating method: Blank-Stamping before plating
- (7) Mold No./Mark/Special No.

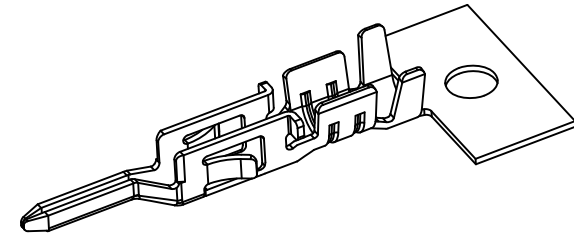SECTION: A-A
SCALE: 1:1SECTION: B-B
SCALE: 1:1SECTION: C-C
SCALE: 1:1SECTION: D-D
SCALE: 1:1

3025TM-PSN	Phosphor Bronze	AWG#20-24	1.85mm(Max)	Stamping Before Plating:30u" Ni Min:70u"Sn Min	3025HF
PART NO	Material	Wire Range	Insulation O.D.	Finish	Used In adzl Housing

GENERAL
TOLERANCEX ± 0.30
.XX ± 0.20
.XXX ± 0.10

PROJECT

思量连接器有限公司
ADZL CONNECTORS CO.,LTD

APPROVAL

Ken

CHECK

Wisely He

DRAWN

Allen

DATA

2015/04/10

PART NO.

3025TM-PSN

TITLE

3.00mm Crimp Style Connectors

UNIT
MMSCALE
1:1NUMBER
A-014REV
D

DATE

OLD REV

NEW REV

ECN

DESCRIPTION

CHECK

APPROVAL