

Product Specification [产品规格书]:	ISSUED BY: Engineering Dept	
	Date Issued	2024/04/10
	Date Revised	2024/4/10

Subject [主题]:

2.00mmPitch 2007 Series Connector Specification

This specification is only referred to the2007 series connector

索引【INDEX】

1. 适用范围 【Scope】
2. 规格与料号 【Spec and Part number】
3. 材质与表面处理 【Disposal of Material and surface】
4. 额定等级 【Ratings and applicable wires】
5. 性能 【 Performance 】
 - 5-1. 电气的性能【Electrical Performance.】
 - 5-2. 机械的性能【Mechanical Performance】
 - 5-3. 环境性能及其它【Environmental Performance and Others】
6. 综合插入力及拔出力 【 Insertion/Withdrawal Force 】
7. SMT 红外线回流条件 【 SMT Infrared Reflow Condition 】

Product Specification [产品规格书]:	ISSUED BY: Engineering Dept	
	Date Issued	2024/04/10
	Date Revised	2024/4/10

Subject [主题]:

2.00mmPitch 2007 Series Connector Specification

【1.适用范围 Scope】

此种规格包括 2.00mm Pitch 2007 Series 连接器规格说明。

This Specification Covers the 2.00mm Pitch 2007 Series Connector Specification.

【2.规格与料号 Spec and Part number】

规格内容 Specification	产品料号 Production No.	产品图示 Picture of Product
端子/Terminal	2007TX-PSN1	
胶壳/Housing	2007H-XX-N0HFWH	
针座/Wafer	2007WRS-XXHF-9TSWNR 2007WVS-XXHF-9TSWNR	

【3.材质与表面处理 Disposal of Material and surface】

规格内容 Specification		材 质 Materials	表面处理 Disposal of Surface
端子/Terminal		磷铜/Phosphor Bronze	Underplated: Ni (1~3μm)overall; Top plating: Sn (2~5 μ m) overall
胶壳/Housing		PA66	白色 white
针座/Wafer	Base	PA9T	本色 color
	PIN	磷铜/Phosphor Bronze	Underplated: Ni (1~3μm)overall; Top plating: Sn (2~5 μ m) overall
	Solder tab	黄铜/Brass	Underplated: Ni (1~3μm)overall; Top plating: Sn (2~5 μ m) overall

(上述参数请以工程图为准/Please Refer to the Project drawing for the above Specification)

【4. 额定等级 Ratings and applicable wires】


项 目【Item】	规 格【Standard】	
额定电压 Rated Voltage (Max.)	250V	
额定电流 Rated Current (Max.)	AWG#22	3.0A
	AWG#24	2.0A
	AWG#26	1.5A
使用温度范围 Ambient temperature Range	-40℃~+105℃	

[illegible]

Product Specification [产品规格书]: Subject [主题]: 2.00mmPitch 2007 Series Connector Specification	ISSUED BY: Engineering Dept	
	Date Issued	2024/04/10
	Date Revised	2024/4/10

【5.性能 PERFORMANCE】




5-1. 电气的性能 Electrical Performance.

项 目 【Item】		条 件 【Test Condition】	规 格 【Requirement】
5-1-1	接触阻抗 Contact Resistance	<p>公母配合,开放电压 20mV 以下,电流 10mA 检测连接器 A~B 区.</p> <p>Mate connectors, measure by dry circuit, 20mV MAX, 10mA.</p> <p>(Based upon EIA-364-06A).</p> 	<p>Initial: 20 milliohms Max.</p> <p>After Test: 40 milliohms Max.</p>
5-1-2	绝缘阻抗 Insulation Resistance	<p>公母配合,在相邻端子,端子与地片之间,使用 250V 的直流电,检测连接器.</p> <p>Mate connectors, apply 250V DC between adjacent terminal or ground.</p> <p>(Based upon EIA-364-21B / MIL-STD-202 Method 302 Cond.B)</p>	1000 Megohms Min.
5-1-3	耐电压 Dielectric Strength	<p>公母配合,在相邻端子,端子与地片之间,使用 800V 的交流电 1 分锺,检测连接器.</p> <p>Mate connectors, apply 800V AC for 1 minute between adjacent terminal or ground.</p> <p>(Based upon EIA-364-20A / MIL-STD-202 Method 301)</p>	<p>不出现中断等情况</p> <p>No Breakdown and Flashover</p>
5-1-4	铆线后端子接触阻抗 Contact resistance on crimped portion	<p>铆线后之端子,开放电压 20mV 以下,电流 10mA 检测连接器.</p> <p>Crimp the applicable wire on to the terminal measure by dry circuit 20mV MAX, 10mA.</p>	5 milliohms Max.




Product Specification [产品规格书]:	ISSUED BY: Engineering Dept	
	Date Issued	2024/04/10
	Date Revised	2024/4/10

Subject [主题]:
 2.00mmPitch 2007 Series Connector Specification


5-2. 机械的性能
Mechanical Performance.

项 目 【Item】		条 件 【Test Condition】	规 格 【Requirement】
5-2-1	插拔力 Insertion & Retention Force	以每分锺 25.4±3mm 的速率插入和拔出. Insert and withdraw Connectors at the speed rate of 25.4±3mm/minute.	参照第 6 项 Refer to paragraph 6
			
5-2-2	端子保持力 Terminal/ Housing Retention Force	以每分 50mm 的速率,将端子从 Housing 内轴向拔出的力量. Apply axial pull out force at the speed rate of 50mm/minute on the terminal assembled in the housing.	9.8N {1.0kgf} Min.
			
5-2-3	端子插入力 Terminal Insertion Force	铆线后之端子插入 Housing 所需最大力量. Insert the crimped terminal into the housing.	9.8N {1.0kgf} Max.
5-2-4	Pin 针保持力 Pin Retention Force	以每分 100mm 的速率,将 PIN 针从 Wafer 内轴向拔出的力量. Apply axial push force at the speed rate of 100mm/minute.	2.94N {0.3kgf} min.
			



Product Specification [产品规格书]:		ISSUED BY: Engineering Dept	
Subject [主题]: 2.00mmPitch 2007 Series Connector Specification		Date Issued	2024/04/10
		Date Revised	2024/4/10
项 目 【Item】	条 件 【Test Condition】	规 格 【Requirement】	
5-2-5 端子压着强度 (Crimped connections)	固定铆线后的端子，使电线与端子分离时所需的最小力量。 Fix the crimped terminal, apply axial pull out force on the wire. (Do not crimp insulation part).	AWG#22 (0.35mm ²)	39.2N{4.0kgf}MIN
		AWG#24 (0.22mm ²)	29.4N{3.0kgf}MIN
		AWG#26 (0.13mm ²)	19.6N{2.0kgf}MIN
		Note> As for unspecified wire sizes in this specification define values with clients	
5-2-6 公母座带卡扣保持力 Male/Female Housing Retention Force	将插好端子的公母座含卡扣以每分钟50±3mm的速度拔出所需要力量。 Mate connectors and apply pull-out force at the speed rate of 50 ± 3mm/min. This Test should be done with positive lock locked.	29.4N {3.0 kgf} MIN.	
5-2-7 抓板力 Catch plate force	将带电线的公端连接器与母端连接器进行连接如下图所示的箭头方向按25-100mm/min的一定速度拉伸至连接器从测定印刷基板脱落的最大荷重。 Connect the male connector with wire with the female connector, and stretch it at a certain speed of 25-100 mm / min in the direction of the arrow as shown in the figure below to the maximum load of the connector falling off from the printed substrate.	19.6N {2.0 kgf} MIN.	
			
			
WRITTEN BY:Deng Jiabing		APPROVED BY:Zhu Genping	
		Sheet: 6 of 8	

Product Specification [产品规格书]:	ISSUED BY: Engineering Dept	
Subject [主题]: 2.00mmPitch 2007 Series Connector Specification	Date Issued	2024/04/10
	Date Revised	2024/4/10



5-3. 环境性能及其它 Environmental Performance and Others.

项 目 【Item】		条 件 【Test Condition】	规 格 【Requirement】	
5-3-1	重复插拔 Repeated Insertion/ Withdrawal	以每分锺不超过 10 次的速率,将公母插拔 30 次. When mated up to 50 cycles repeatedly by the rate of 10 cycles per minute.	接触阻抗 Contact Resistance	40 milliohms Max.
5-3-2	温升测试 Temperature Rise	公母连接器配合后, 加载额定电流直到温度上升到稳定状态, 然后再测量温升 Mating connectors shall be energized at rating current until thermal stability is achieved,and then measured the termperature rise. (UL498)	温升测试 Temperatu re rise	30℃ Max.
5-3-3	耐振动性 Vibration	振幅: 1.5mm P-P 时间: 10~55~10 HZ in 1 minute 持续时间: 每轴向 2 小时 Amplitude: 1.5mm P-P Sweep time: 10~55~10 HZ in 1 minute Duration: 2 hours in each X.Y.Z axials. (Based upon EIA-364-28B/MIL-STD-202 Method 213B Cond.A)	外观 Appearanc e	无异状 No Damage
			接触阻抗 Contact Resistance	40 milliohms Max.
			瞬断 Discontinu ity	1 micro-second Max.
5-3-4	耐冲击性 Shock	在 X.Y.Z 上 6 个方向上,以 490m/s ² (50g 的力量) 冲击下各 3 回 .490m/s ² {50G}, 3 strokes in each X.Y.Z. axes. (Based upon EIA-364-27B/MIL-STD-202 Method 213B Cond.A)	外观 Appearanc e	无异状 No Damage
			接触阻抗 Contact Resistance	40 milliohms Max.
			瞬断 Discontinu ity	1 micro-second Max.
5-3-5	耐热性 Heat Resistance	105±2℃,96 hours. (Based upon MIL-STD-202 Method 108A Cond.A)	外观 Appearance	无异状 No Damage
			接触阻抗 Contact Resistance	40 milliohms Max.



Product Specification [产品规格书]:			ISSUED BY: Engineering Dept	
Subject [主题]: 2.00mmPitch 2007 Series Connector Specification			Date Issued	2024/04/10
			Date Revised	2024/4/10
5-3-6	耐寒性 Cold Resistance	-40±5°C,96 hours. (Based upon EIA-364-105)	外观 Appearance	无异状 No Damage
			接触阻抗 Contact Resistance	40 milliohms Max.
5-3-7	耐湿性 Humidity	温度: 40±2°C 湿度: 90~95%(RH) 持续时间: 96 hours Temperature: 40±2°C Relative Humidity: 90~95% Duration: 96 hours (Based upon EIA-364-31A/MIL-STD-202 Method 103B Cond.B)	外观 Appearance	无异状 No Damage
			接触阻抗 Contact Resistance	40 milliohms Max.
			耐电压 Dielectric Strength	Must meet 5-1-3
			绝缘阻抗 Insulation Resistance	100 Megohms Min.
5-3-8	温度变化 Temperature Cycling	从-40°C持续 30 分钟升至+105°C持续 30 分钟,循环 5 次. 5 cycles of: a) -40°C 30 minutes. b) +105°C 30 minutes. (Based upon EIA-364-32B)	外观 Appearance	无异状 No Damage
			接触阻抗 Contact Resistance	40 milliohms Max.
5-3-9	盐水喷雾 Salt Spray	在温度 35±2°C,盐水浓度 5±1%下,盐水喷雾 48±1 小时. 48±1 hours exposure to a salt spray from the 5±1% solution at 35±2°C. (Based upon EIA-364-26A/MIL-STD-202 Method 101D Cond.B).	外观 Appearance	无异状 No Damage
			接触阻抗 Contact Resistance	40 milliohms Max.
5-3-10	焊锡附着性 Solder-ability	焊接时间: 3~5 秒. 焊接温度: 245±5°C. Soldering Time: 3±0.5second. Solder Temperature: 245±5°C. (Based upon EIA-364-52)	Solder Wetting	浸渍面积需 95%以上 95% of immersed area must show no voids, pin holes.
WRITTEN BY:Deng Jiabing			APPROVED BY:Zhu Genping	
			Sheet: 8 of 8	

Product Specification [产品规格书]:	ISSUED BY: Engineering Dept	
	Date Issued	2024/04/10
	Date Revised	2024/4/10
Subject [主题]: 2.00mmPitch 2007 Series Connector Specification		

项 目 【Item】		条 件 【Test Condition】	规 格 【Requirement】	
5-3-1 1	焊锡耐热性 Solder-Resistance	焊接时间: 5~10 秒. 焊接温度: 255+5/-5°C. Soldering time:5~10 sec solder. Temperature:255+5/-5°C. (Based upon EIA-364-56A)	外观 Appearance	无异状 No Damage

【6.综合插入力及拔出力 INSERTION/WITHDRAWAL FORCE】 <Connector mating force>

PIN 数 No. of CKT	初次插入力(最大值) First Insertion (kgf Max.)	30 次拔出力(最小值) 30 th Withdrawal (kgf Min.)	PIN 数 No. of CKT	初次插入力(最大值) First Insertion (kgf Max.)	30 次拔出力(最小值) 30 th Withdrawal (kgf Min.)
02	0.66	0.04	09	2.97	0.18
03	0.99	0.06	10	3.30	0.20
04	1.32	0.08	11	3.63	0.22
05	1.65	0.10	12	3.96	0.24
06	1.98	0.12	13	4.29	0.26
07	2.31	0.14	14	4.62	0.28
08	2.64	0.16	15	4.95	0.30


注：以上插拔次数为 30 次

Note: Insertion and Withdrawal for 30Cycles



Product Specification [产品规格书]:	ISSUED BY: Engineering Dept	
	Date Issued	2024/04/10
	Date Revised	2024/4/10
Subject [主题]: 2.00mmPitch 2007 Series Connector Specification		

【7. SMT 红外线回流条件 SMT INFRARED REFLOW CONDITION】

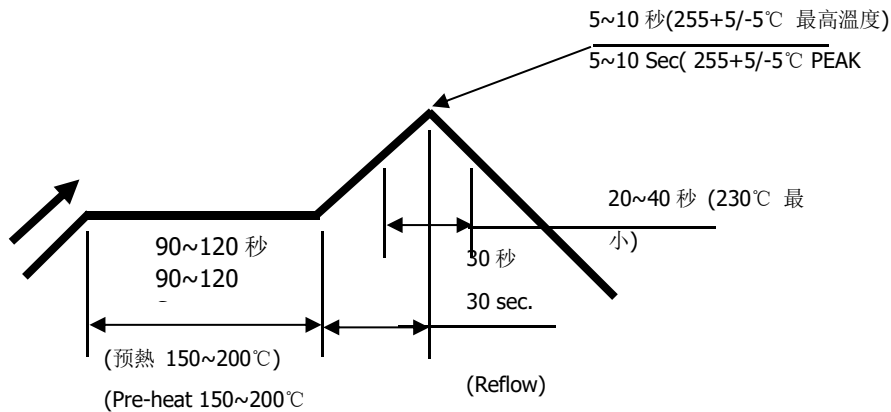

温度条件曲线图/ 基板上温度

TEMPERATURE CONDITION GRAPH/ (TEMPERATURE ON BOARD PATTERN SIDE)

注记：由于 P.C 板等焊接装置改变条件,所以请预先用自己的装置检查回流焊的条件。

Notes: Please check the reflow soldering condition by your own devices beforehand. Because the condition changes by the soldering devices, P.C. boards, and so on.